


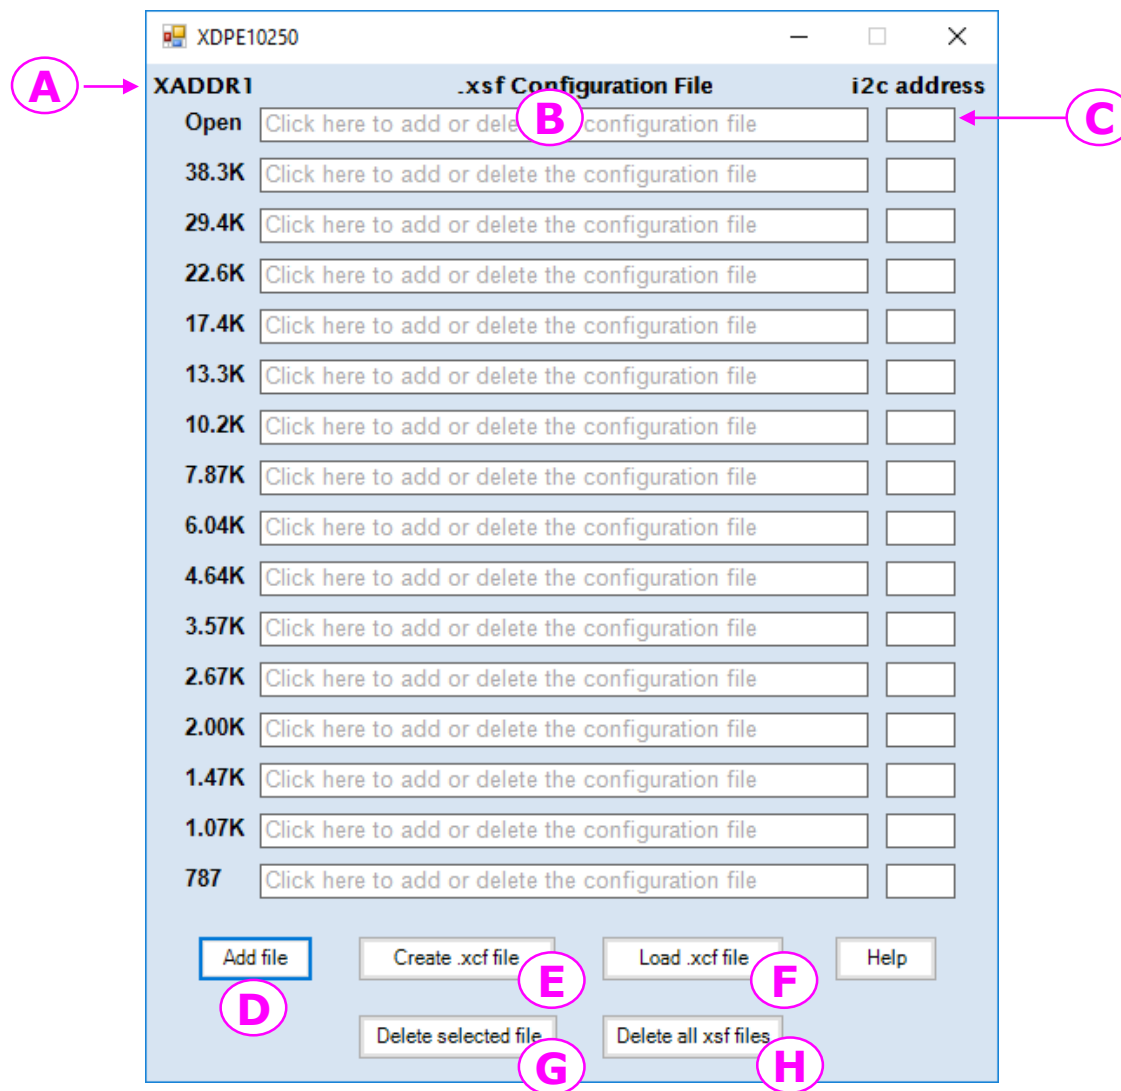

A. XADDR1

- The resistor should be connected to the XADDR1 pin in order to load the selected image to the memory at power up.

B. .xsf Configuration File

- Click the box to select a image to be added or deleted. After selection, click “Add file” or “Delete selected file” button.

C. i2c address

- This is the i2c address of the image in the xsf file for identifying the loaded image.

D. Add file

- Add configuration data to the selected image location

E. Create xcf file

- Click to create the multi image configuration file

F. Load xcf file

- Click to load a previously saved xcf file

G. Delete selected file

- Click to delete the selected configuration file

H. Delete all xsf file

- Click to delete all configuration files in the above xsf file table